

	Technical Specifications	Standard Requirements	Test Results
	Water Absorption UNI EN ISO 10545-03	<0.5%	0.1%
	Breaking Strength UNI EN ISO 10545-04	Minimum: 1300 N	1800-2400 N
	Modulus of Rupture UNI EN ISO 10545-04	Minimum: 35 N/mm <sup>2</sup>	35-45 N/mm <sup>2</sup>
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: e > 0,55	e 50,55 Restitution Coefficient
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm <sup>3</sup>	110-130 mm <sup>3</sup>
	Thermal Linear Expansion UNI EN ISO 10545-08	Minimum for Floor Applications: Class 3	27x10.- 6° C
	Thermal Shock Resistance UNI EN ISO 10545-09	Resistant	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	0,0%
	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB Acids And Alkalis: As Reported	UA ULC-UMC
	Stain Resistance UNI EN ISO 10545-03	Minimum: Class 3	5
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	Depends of the color
COF	Static Coefficient of Friction (COF) ASTM C 1028	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.60	DRY: >0,60 WET: >0,60
DCOF	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.42	> 0,42
	Shade Variation Not Available	As Reported	V2
	Thickness Not Available	As Reported	12"x24"-0,35" / 24"x48"-0,45" 48"x48"-0,45" / 24"x24"-0,4
	Number of Screens Not Available	As Reported	12"x24"-31" / 24"x48"-10" / 48"x48"-5 / 24"x24"-20

GROUT JOINT REQUIRED FOR RECTIFIED EDGE TILE  
1/2 BROKEN JOINT NOT RECOMMENDED



The data refers to first choice material in the natural version.



WWW.HAPPY-FLOORS.COM

# BALTIMORE

## FULL BODY PORCELAIN

GRIS





MARENGO




PERLA



TAUPE

PERLA

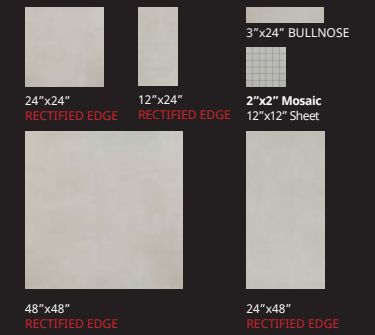

TAUPE



MARENGO




PERLA



TAUPE

GRIS

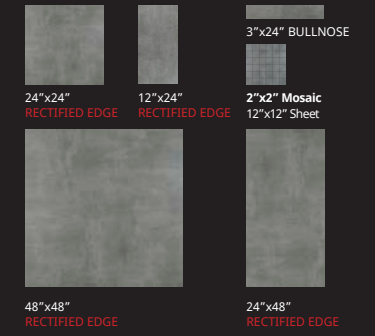

MARENGO

