




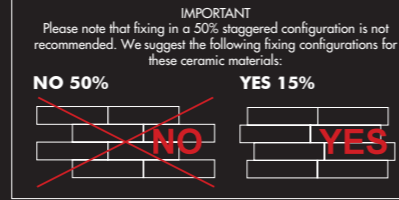

Technical Specification	Reference Standard	Standard Requirements	Test Results
Water Absorption	UNI EN ISO 10545-03	< 0.5%	According to
Breaking Strength	UNI EN ISO 10545-04	Minimum: 1300 N	According to
Modulus Of Rupture	UNI EN ISO 10545-04	Minimum: 35 N/mm ²	According to
Shock Resistance	UNI EN ISO 10545-05	Suggested Minimum: e > 0.55	According to
Resistance to Deep Abrasion	UNI EN ISO 10545-06	Maximum: 175 mm ³	According to
Thermal Linear Expansion	UNI EN ISO 10545-08	As Reported	$\alpha \leq 7 \times 10^{-6} / ^\circ C$
Thermal Shock Expansion	UNI EN ISO 10545-09	Resistant	According to
Moisture Expansion	UNI EN ISO 10545-10	As Reported	-
Frost Resistance	UNI EN ISO 10545-12	As Reported	Resistant
Chemicals Resistance	UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB Acids and Alkalies: As Reported	GHA
Stain Resistance	UNI EN ISO 10545-14	Minimum: Class 3	Class 5
PEI Rating (Scratch Resistance)	ASTM C 1027	As Reported	PEI IV
Static Coefficient of Friction (COF)	ASTM C 1028	For Level interior Spaces Expected to be Walked Upon When Wet	DRY ≥ 0.60 WET ≥ 0.60
Dynamic Coefficient of Friction (DCOF)	ANSI A137.1	For Level interior Spaces Expected to be Walked Upon When Wet	≥ 0.42 According to
Thickness	9 mm		
8"x32" Number of Screens	12		
12"x24" Number of Screens	12		



GROUT JOINT - REQUIRED FOR RECTIFIED EDGE TILE
1/2" BROKEN JOINT NOT RECOMMENDED

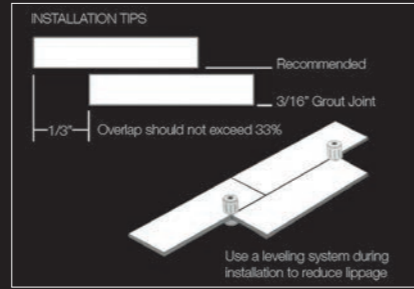

Bellagio
PORCELAIN

