




	Technical Specifications	Standard Requirement		Test Result
		Reference Standard		
	Water Absorption	< 0,5 UNI EN ISO 10545-03		0,2%
	Breaking Strength	Minimum: 1300 N UNI EN ISO 10545-04		Compliant
	Modulus of Rupture	Minimum: 35 N/mm ² UNI EN ISO 10545-04		Compliant
	Shock Resistance	Suggested Minimum: e>0,55 UNI EN ISO 10545-05		Compliant
	Resistance to Deep Abrasion	Maximum: 175 mm ³ UNI EN ISO 10545-06		Compliant
	Thermal Linear Expansion	Tests method available UNI EN ISO 10545-08		≤ 7 · MK ⁻¹
	Thermal Shock Resistance	Resistant UNI EN ISO 10545-09		Compliant
	Frost Resistance	As Reported UNI EN ISO 10545-12		Compliant
	Chemical Resistance	Domestic Chemical Products: UB / GB Acids and Alkalis: As Reported UNI EN ISO 10545-13		Compliant ULA
	Stain Resistance	Minimum: Class 3 UNI EN ISO 10545-14		Class 5
	Static Coefficient of Friction (COF)	For Level Interior Spaces Expected to be Walked Upon When Wet: > 0.62 ASTM C 1028		DRY: 0.81 WET: 0,62
	Dynamic Coefficient of Friction (DCOF)	For Level Interior Spaces Expected to be Walked Upon When Wet	> 0.42	>0.42 WET
	Shade Variation	As Reported Not available		V3
	Thickness	As Reported Not available		10mm
	Number of Screens	As Reported Not available		40

The data refers to first choice material in the natural version.

GROUT JOINT REQUIRED FOR RECTIFIED EDGE TILE

1/2 BROKEN JOINT
NOT RECOMMENDED



MANUFACTURE RECOMMENDS 1/3
OR LESS STAGGERED SPACING



HAPPY FLOORS




I-Design Collection
www.Happy-Floors.com



Acorn

Full Body Porcelain




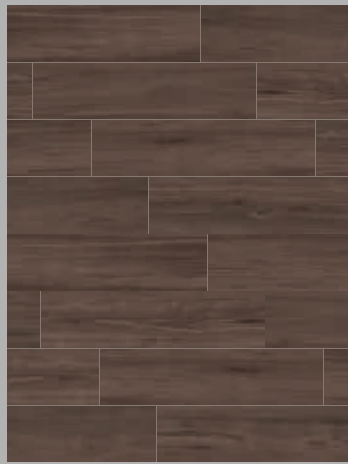

Mahogany



9"x36" RECTIFIED EDGE



3"x18" Bullnose

Walnut



9"x36" RECTIFIED EDGE



3"x18" Bullnose



Grey



Pecan



Pecan




9"x36" RECTIFIED EDGE



3"x18" Bullnose

Natural

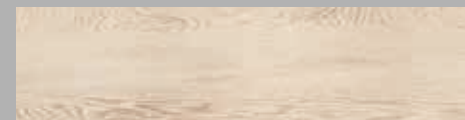

9"x36" RECTIFIED EDGE




3"x18" Bullnose



White



Walnut

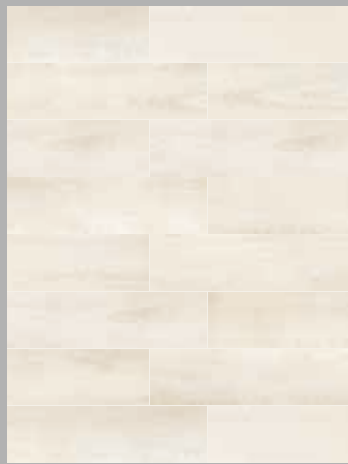

White



9"x36" RECTIFIED EDGE



3"x18" Bullnose

Grey



9"x36" RECTIFIED EDGE



3"x18" Bullnose



Natural



Mahogany

White

Grey