



	Standards	Required Value	Avg. Value
	ISO 10545 / 3 Water Absorption	Grupo B1 A / E < 0,5%	Meets requirements
	ISO 10545 / 4 Modulus of Rupture	> 1300 N	Meets requirements
	ISO 10545 / 5 Bending strength	> 35 N/mm <sup>2</sup>	Meets requirements
	ISO 10545 / 7 Resistance to abrasion (PEI)	Between I - V	Blanc / Tanned IV Midnight III
	ISO 10545 / 12 Frost resistance	Resistant	Meets requirements
	ISO 10545 / 13 Chemical resistance	Min. GB / GLB	Meets requirements
	ANSI A 137.1-2012 DCOF Slip resistance	Wet ≥ 0.42	Wet ≥ 0.42
	ANSI A 137.1-2012 SCOF Slip resistance	Wet ≥ 0.60 Dry ≥ 0.70	Wet ≥ 0.60 Dry ≥ 0.70

1/2 BROKEN JOINT NOT RECOMMENDED.  
MANUFACTURE RECOMMENDS 1/3 OR  
LESS STAGGERED SPACING



**Jaipur**  
FULL BODY PORCELAIN

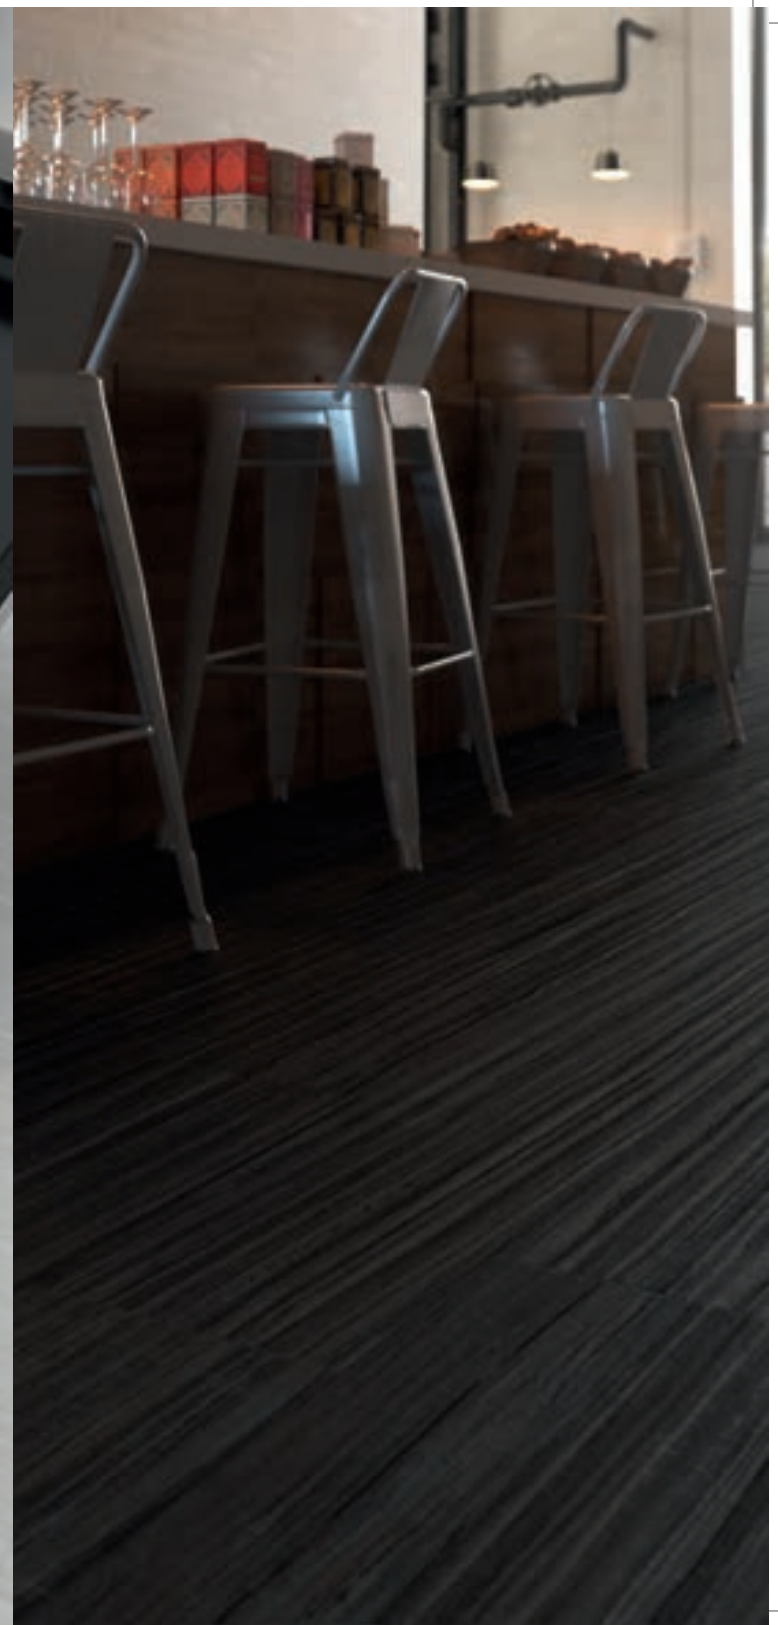

JAIPUR BLANC

JAIPUR TANNED

JAIPUR MIDNIGHT




**Jaipur**  
FULL BODY PORCELAIN


JAIPUR BLANC



15"x30" Rectified Edge




BULLNOSE 3"x15"




MOSAIC 1.25"x4"  
(12"x12" sheet)

JAIPUR TANNED

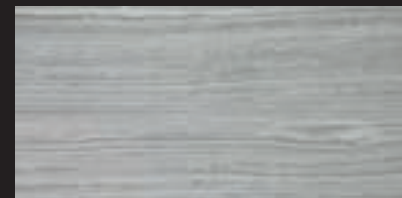

15"x30" Rectified Edge




BULLNOSE 3"x15"




MOSAIC 1.25"x4"  
(12"x12" sheet)


JAIPUR MIDNIGHT

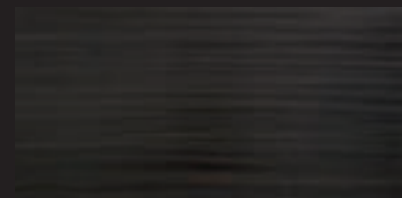

15"x30" Rectified Edge



BULLNOSE 3"x15"



MOSAIC 1.25"x4"  
(12"x12" sheet)