



Technical Specifications NEXTONE	Standard Requirements	Test Results	
Water Absorption UNI EN ISO 10545-03	< 0,5%	< 0,2% Bla	
Breaking strenght UNI EN ISO 10545-04	Minimum 1300 N	2500 N 10mm 13600 N 20mm	
Modulus of rupture UNI EN ISO 10545-04	Minimum 35 N/mm <sup>2</sup>	50 N/mm <sup>2</sup>	
Shock resistance UNI EN ISO 10545-05	Suggested Minimum E > 0,55	Not required	
Resistance to deep abrasion UNI EN ISO 10545-06	Maximum 175 mm <sup>3</sup>	Not required	
Thermal linear expansion UNI EN ISO 10545-08	Minimum for Floor Applications: Class 3	Not required	
Thermal shock resistance UNI EN ISO 10545-09	As reported	6,3 · 10 <sup>-6</sup> / °C	
Moisture expansion UNI EN ISO 10545-10	Required	Complies with the standard	
Frost resistance UNI EN ISO 10545-12	Required	Complies with the standard	
Chemical resistance UNI EN ISO 10545-13	Domestic chemical products: GA	GA	
	Acids and Alkalis: As reported	GLA / GHA	
Stain resistance UNI EN ISO 10545-14	Minimum: Class 3	5	
PEI Rating (Scratch Resistance) ASTM C 1027	As reported	White, Gray, Taupe, Dark 5	
Static Coefficient of Friction (COF) ASTM C 1028	For Level Interior Spaces Expected to be walked upon when wet > 0,60	DRY: > 0,60	WET: > 0,60
		0,62	
Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be walked upon when wet > 0,42	0,62	
Shade variation	As Reported	V3   MEDIUM	
Thickness	As Reported	24"x48" 10mm	12"x24" 10mm
		24"x24" 10mm	
Number of Screens	As Reported	24"x48" 18 screens 24"x24" 36 screens 12"x24" 72 screens	

**GROUT JOINT REQUIRED FOR RECTIFIED EDGE TILE.  
½ BROKEN JOINT NOT RECOMMENDED**

1/2 BROKEN JOINT NOT  
RECOMMENDED



MANUFACTURER RECOMMENDS  
1/3 OR LESS STAGGERED SPACING



**HAPPY FLOORS**



The data refers to first choice material in the natural version.



# NEXTONE

## RECTIFIED PORCELAIN



GRAY



WHITE



GREY




TAUPE



DARK

WHITE

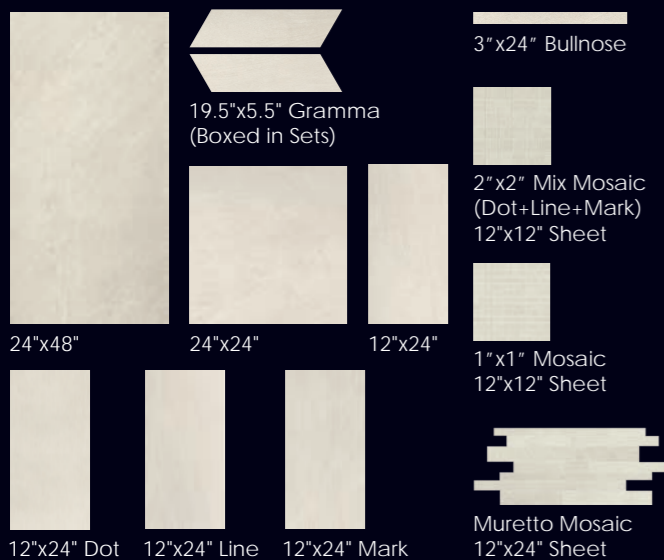

OUTDOOR GRIP/SANDED FINISH 2CM (3/4")



24"x48" 2CM

24"x24" 2CM

GREY



OUTDOOR GRIP/SANDED FINISH 2CM (3/4")




24"x48" 2CM

24"x24" 2CM

TAUPE




OUTDOOR GRIP/SANDED FINISH 2CM (3/4")

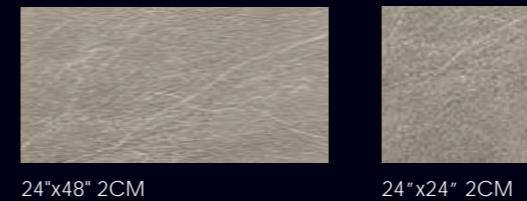


24"x48" 2CM

24"x24" 2CM

DARK

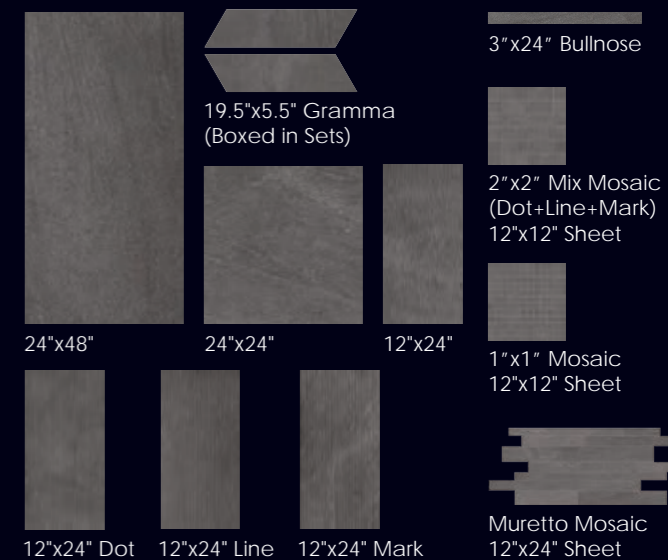

OUTDOOR GRIP/SANDED FINISH 2CM (3/4")

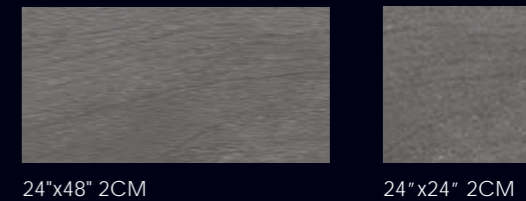

24"x48" 2CM

24"x24" 2CM