




















	Technical Specifications	Standard Requirements	Test Results
	Water Absorption UNI EN ISO 10545-03	<0.5%	≥ 0.5%
	Breaking Strength UNI EN ISO 10545-04	Minimum: 1300 N	1 600 - 2400 N
	Modulus of Rupture UNI EN ISO 10545-04	Minimum: 35 N/mm²	35 - 45 N/mm²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: e > 0,55	Resistant
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm³	< 130 mm
	Thermal Linear Expansion UNI EN ISO 10545-08	Minimum for Floor Applications: Class 3	< 7 x 10-6 °C-1
	Thermal Shock Resistance UNI EN ISO 10545-09	Resistant	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	< 0.1
	Frost Resistance UNI EN ISO 10545-12	As Reported	Compliant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB Acids and Alkalis: As Reported	Polished: GLB Honed: GLA
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	5
<b>PEI</b>	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	PEI IV
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.42	Polished: N/A Honed: ≥ 0.42
	Shade Variation	As Reported	V3
	Thickness	As Reported	36" x 36" - 10.5 mm 24" x 48" - 10.5 mm 24" x 24" - 9.5 mm 12" x 24" - 9 mm
	Number of Screens	As Reported	36" x 36" - 10 24" x 48" - 11 24" x 24" - 24 12" x 24" - 48

Grout joint required for rectified edge  
tile 1/2 broken joint not recommended

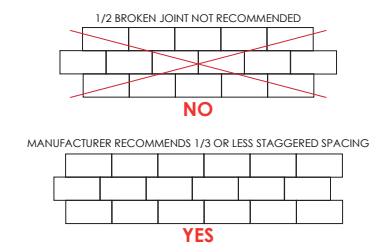

#### INSTALLATION TIPS




**HAPPY FLOORS**



≥ 34%



The data refers to first choice material in the natural version.

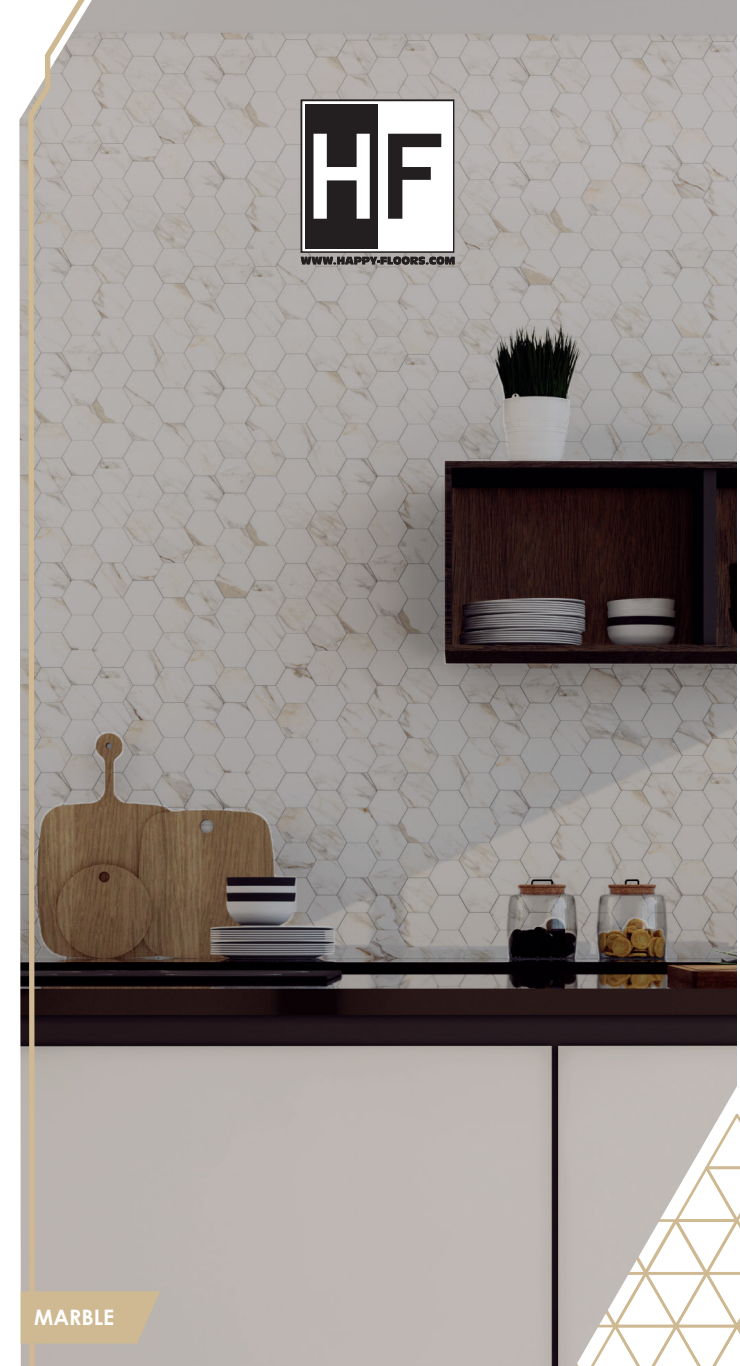


MARBLE

**DORIAN**  
RECTIFIED PORCELAIN




# DORIAN


Dazzle your home with the brilliance of a golden-marble: the Dorian collection. A calacatta inspired- collection, Dorian's high contrast veining give it a distinct air of opulence and luxury. Its golden tone sets it apart from the more frequently seen grey-veined marbles.




**24" x 48"**  
(Honed/  
Polished)




**36" x 36"**  
(Honed/ Polished)



**24" x 24"**  
(Honed/  
Polished)




**12" x 24"**  
(Honed/  
Polished)



**2" x 2" Mosaic**  
Honed/ Polished  
(12" x 12" Sheet)



**Hexagon Mosaic**  
Honed/ Polished  
(9" x 13" Sheet)  
Net Coverage 0.75 sqft



**Triangle Mosaic**  
Honed/ Polished  
(12" x 12" Sheet)  
Net Coverage 0.97 sqft

Available in two finishes: polished and honed, four sizes: 24" x 48", 36" x 36", 24" x 24", 12 x 24", and three mosaics: 2" x 2", hexagon and triangle mosaic the Dorian collection is teeming with opportunities to bring integrated design solutions to the home.

