


	Technical Specifications	Standard Requirements	Test Results
\Diamond	Water Absorption UNI EN ISO 10545-03	E≤0.5%	≤0.1%
Ų.	Breaking Strength UNI EN ISO 10545-04	≥1300 N	≥ 2500 N
<u>↓</u>	Modulus of Rupture UNI EN ISO 10545-04	> 35 N/mm²	> 50 N/mm²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	Resistant
(Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm³	≤ 143 mm³
<u>±</u>	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	6 x 10 ⁻⁶ /°C ⁻¹
洙	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant
٥٥٥	Moisture Expansion UNI EN ISO 10545-10	As Reported	0.1 mm/m
*	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant
₽ P	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/ GB Acids and Alkalis: As Reported	GLA GHA
×	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 5
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	IV
Š,	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.42	≥ 0.42
	Shade Variation	As Reported	V2
↓	Thickness	As Reported	12" x 24" - 9 mm 24" x 24" - 9 mm
	Number of Screens	As Reported	12" x 24" - 32 24" x 24" - 16

Grout joint required for rectified edge tile 1/2 broken joint not recommended








I-Design DIGITAL INCRETTILE ≥ 40%









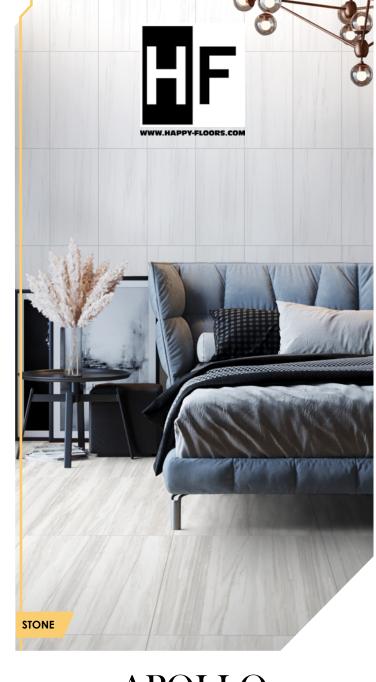




FULL BODY RECTIFIED PORCELAIN



APOLLO

The Apollo collection is a feat of contemporary beauty. With strong linear patterning and three elegant neutral tones, it is the perfect foundation for a modern home design that values cleanliness and simplicity.

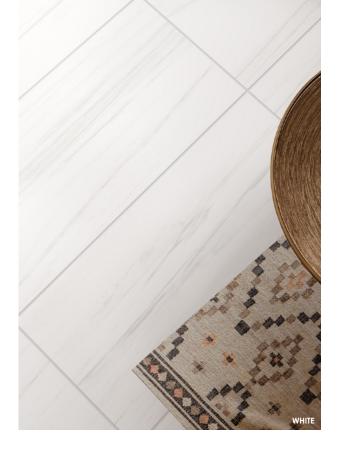







BEIGE







12" x 24"



2" x 2" Mosaic (12" x 12" Sheet)



WHITE



24" x 24"



2" x 2" Mosaic (12" x 12" Sheet)

GREY

3" x 24" Bullnose



3" x 24" Bullnose

2" x 2" Mosaic (12" x 12" Sheet)

12" x 24"

