



	Technical Specifications	Standard Requirements	Test Results
<b></b>	Water Absorption UNI EN ISO 10545-03	E≤0.5%	≤ 0.5%
>	Breaking Strength UNI EN ISO 10545-04	≥1300 N	≥ 1300 N
<del>••</del>	Modulus of Rupture UNI EN ISO 10545-04	> 35 N/mm²	> 35 N/mm²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	N/A
( <u>(i)</u>	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm³	≤ 140 mm³
<u>±</u>	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	7.1 x 10 <sup>-6</sup> /°C <sup>-1</sup>
洙	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant
<u>۵۵۵</u>	Moisture Expansion UNI EN ISO 10545-10	As Reported	N/A
**	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant
\ <u>\</u>	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: GB Acids and Alkalis: As Reported	UB Min ULA - ULC UHA - UHC
×	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 3
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	IV
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.42	≥ 0.42
	Shade Variation	As Reported	V2
<u></u>	Thickness	As Reported	12" x 24" - 10 mm 30" x 30" - 10 mm 30" x 60" - 10 mm
	Number of Screens	As Reported	12" x 24" - 92 30" x 30" - 46 30" x 60" - 23

Grout joint required for rectified edge tile 1/2 broken joint not recommended
























## LIMEROCK

RECTIFIED PORCELAIN



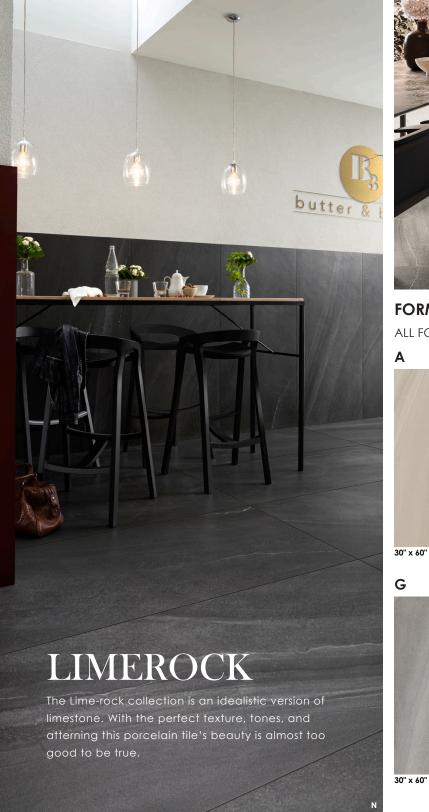



## **FORMATS**

ALL FORMATS AVAILABLE IN NATURAL FINISH

12" x 24"

30" x 30"

12" x 24"

3" x 24" Bullnose

3" x 24" Bullnose

Α

30" x 60"

G



30" x 30"







2" x 2" Mosaic

12" x 12" Sheet

Herringbone Mosaic

11" x 13" Sheet Net Coverage: 0.97 sqft



Herringbone Mosaic 11" x 13" Sheet Net Coverage: 0.97 sqft





3" x 24" Bullnose





Herringbone Mosaic



11" x 13" Sheet Net Coverage: 0.97 sqft





30" x 60"









3" x 24" Bullnose





