














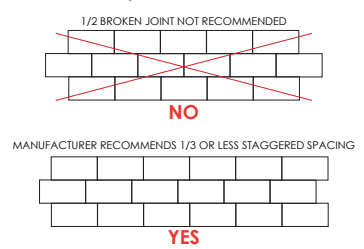





	Technical Specifications	Standard Requirements	Test Results
	Water Absorption UNI EN ISO 10545-03	E ≤ 0.5%	≤ 0.1%
	Breaking Strength UNI EN ISO 10545-04	≥ 1300 N	≥ 1300 N
	Modulus of Rupture UNI EN ISO 10545-04	> 35 N/mm²	Standard: > 35 N/mm² Pavers: > 45 N/mm²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	N/A
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm³	Standard: < 175 mm³ Pavers: < 140 mm³
	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	< 7 x 10 ⁻⁶ /°C ⁻¹
	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant
	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/ GB Acids and Alkalies: As Reported	Standard: LA, LB to LC Pavers: Class A
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Standard: Class 5 Pavers: Class 3
	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	B, G: IV W: V N: III
	Dynamic Coefficient of Friction (DCOF) ANSI A 137.1	For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.42	≥ 0.42
	Shade Variation	As Reported	V2
	Thickness	As Reported	Standard - 10 mm 12" x 24" 24" x 24" 24" x 48" Pavers - 20 mm 24" x 24" 24" x 48"
	Number of Screens	As Reported	Standard: 12" x 24" - 64 24" x 24" - 32 24" x 48" - 16 Pavers: 24" x 24" - 36 24" x 48" - 18

Grout joint required for rectified edge tile
1/2 broken joint not recommended



INSTALLATION TIPS



HAPPY FLOORS



20 - 40%



X-ROCK

FULL BODY RECTIFIED PORCELAIN
& RECTIFIED PORCELAIN PAVERS





X-ROCK

Picking up on elements of natural stone, concrete, and contemporary textures, X-Rock is both natural and modern in its sophistication. It's intriguing texture mirrors that which has been popularized by contemporary concrete-looks, while the organic veining throughout is reminiscent of natural stone.

In addition to the traditional 12" x 24" and 24" x 24" sizes, X-Rock is available in a progressive large format. These 24" x 48" tiles make any room an impressive space.

Available in four neutral colors, X-Rock can find its place in any home's color palette. G, a stunning grey tone and texture that emulates the serene features of the moon. While the light W and B replicate the moods and tones of an adobe desert. N, black in color, recalls a stunning slate, while staying true to the line's modern feel.

FULL BODY RECTIFIED PORCELAIN

W



24" x 48"



24" x 24"

B



24" x 48"



24" x 24"



12" x 24"



2" x 2" Mosaic
(12" x 12" Sheet)



3" x 24" Bullnose



12" x 24"




2" x 2" Mosaic
(12" x 12" Sheet)




3" x 24" Bullnose

G



24" x 48"



24" x 24"



12" x 24"



2" x 2" Mosaic
(12" x 12" Sheet)



3" x 24" Bullnose

N



24" x 48"



24" x 24"



12" x 24"



2" x 2" Mosaic
(12" x 12" Sheet)



3" x 24" Bullnose

X-ROCK PORCELAIN PAVERS

Available in two sizes: 24" x 48" and 24" x 24" and four neutral colors, this brilliant fusion adds a warm, earthy refinement to the traditionally cool mood that stone-look collections are known for. The result is a line that brings an organic and modern sophistication to spaces.

OUTDOOR NATURAL FINISH 2CM (3/4") PAVERS

W



24" x 48"



24" x 24"

B




24" x 48"




24" x 24"

G




24" x 48"



24" x 24"

N



24" x 48"



24" x 24"

