













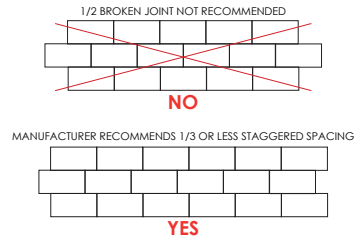





| | Technical Specifications | Standard Requirements | Test Results |
|-----------------------------------------------------------------------------------|-------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------|
|  | Water Absorption UNI EN ISO 10545-03 | <0.10% | 14% |
|  | Breaking Strength UNI EN ISO 10545-04 | Minimum: 600 N | >600 N |
|  | Modulus of Rupture UNI EN ISO 10545-04 | Minimum: 12 N/mm² | 12 N/mm² |
|  | Shock Resistance UNI EN ISO 10545-05 | Suggested Minimum: E > 0.55 | N/A |
|  | Resistance to Deep Abrasion UNI EN ISO 10545-06 | Maximum: 175 mm³ | N/A |
|  | Thermal Linear Expansion UNI EN ISO 10545-08 | As Reported | 6.3 - 10 [±] /°C |
|  | Thermal Shock Resistance UNI EN ISO 10545-09 | Required | Resistant |
|  | Moisture Expansion UNI EN ISO 10545-10 | As Reported | 0.3mm/m |
|  | Frost Resistance UNI EN ISO 10545-12 | As Reported | Not Resistant |
|  | Chemical Resistance UNI EN ISO 10545-13 | Domestic Chemical Products: Acids and Alkalis: As Reported | GLA GHA |
|  | Stain Resistance UNI EN ISO 10545-14 | Minimum: Class 3 | 5 |
| PEI | PEI Rating (Scratch Resistance) ASTM C 1027 | As Reported | N/A |
| COF | Static Coefficient of Friction (COF) ASTM C 1028 | For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.60 | N/A |
|  | Dynamic Coefficient of Friction (DCOF) ANSI A137.1 | For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.42 | N/A |
|  | Shade Variation | As Reported | V1 |
|  | Thickness | As Reported | 12" x 36" Solid - 8.6mm 12" x 36" Relief - 10.8mm |
|  | Number of Screens | As Reported | 1 Screen |

Grout joint required for rectified edge tile
1/2 broken joint not recommended



INSTALLATION TIPS



HAPPY FLOORS



≥ 34%



WALL TILE

GLACIAR & GLACIAR 2.0

WHITE BODY RECTIFIED CERAMIC WALL TILE

GLACIAR & GLACIAR 2.0

Add dimension to your space with Glaciar and Glaciar 2.0 from Happy Floors—an imaginative collection of large format wall tile. These ceramic tiles are the perfect solution to refresh and lighten up any space. The collection is available in a crisp, warm shade of white, two finishes: matte and glossy and a wide range of textures that add a twist of surprise and intrigue to any space.

LEAVES MATTE



EDEN GLOSSY

SOLID GLOSSY

THINK OUTSIDE
THE BOX AND BE BOLD
WITH GLACIAR,
AN IMPRESSIVE RANGE OF
3D WALL TEXTURES.

The flagship Glaciar collection is made of a solid texture is ideal for lovers of minimalistic, white walls. Nude is an undulating wave pattern whose curves add an element of softness to the tile's hard surface. Mojave is a texture filled with a surprising and angular cracked pattern. The original collection is rounded off by the wave texture which has a natural, organic direction to its tightly undulating pattern.

This already impressive line has expanded to include three new bold patterns: Eden (the increasingly popular hexagon shape), Leaves (an elegant design that depicts abstracted leaves swaying in the wind), and Twin (an on trend, right on time chevron pattern).



WAVE MATTE

MOJAVE MATTE



NUDE GLOSSY

GLACIAR 2.0 GLOSSY




12"x 36"

12"x 36"

12"x 36"

GLACIAR GLOSSY

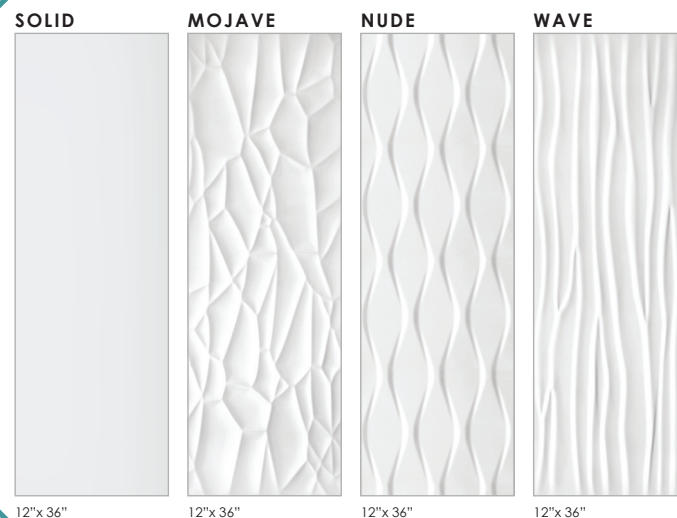

12"x 36"

12"x 36"

12"x 36"

12"x 36"

GLACIAR MATTE



12"x 36"

12"x 36"

12"x 36"

12"x 36"

GLACIAR 2.0 MATTE



12"x 36"

12"x 36"

12"x 36"