





















	Technical Specifications	Standard Requirements	Test Results
	Water Absorption UNI EN ISO 10545-03	E ≤ 0.5%	Standard: ≤ 0.5% Paver: ≤ 0.1%
	Breaking Strength UNI EN ISO 10545-04	≥ 1300 N	≥ 1300 N
	Modulus of Rupture UNI EN ISO 10545-04	> 35 N/mm ²	Standard: > 35 N/mm ² Paver: > 45 N/mm ²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	Standard: N/A Paver: Resistant
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm ³	Standard: < 175 mm ³ Paver: < 140 mm ³
	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	< 7 10 ⁻⁴ /°C ⁻¹
	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	0 mm/m
	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products; UB/ GB Acids and Alkalis: As Reported	Standard: A LA Pavers: Class A
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Standard: Class 5 Pavers: Min. Class 3
	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	AG / CG / G - IV N / DG - III
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.42	≥ 0.42
	Shade Variation	As Reported	V2
	Thickness	As Reported	Standard - 10 mm 12" x 24" - 24" x 48" 18" x 36" - 36" x 36" 24" x 24" - 48" x 48" Pavers - 20 mm 24" x 24" - 36" x 36" Guaged - 6.5 mm 48" x 48" - 48" x 103"
	Number of Screens	As Reported	Standard & Guaged 12" x 24" - 112 18" x 36" - 48 24" x 24" - 56 24" x 48" - 28 36" x 36" - 24 48" x 48" - 8 Pavers 24" x 24" - 56 36" x 36" - 24

Grout joint required for rectified edge tile
1/2 broken joint not recommended

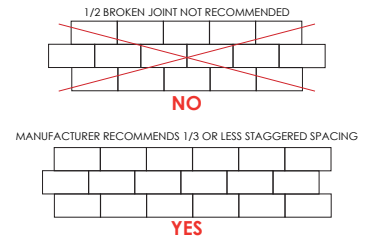

INSTALLATION TIPS



HAPPY FLOORS



WWW.HAPPYFLOORS.COM

CONCRETE

PORCELAIN PAVERS

AZUMA

FULL BODY RECTIFIED PORCELAIN
& RECTIFIED PORCELAIN PAVERS



AZUMA

Subtle in its approach, the Azuma collection is a soft take on a concrete-look porcelain tile. Quiet shifts in tone can be seen throughout each tile, creating a design that is industrial but less cold than other concrete-looks. This discretely impressive collection is a nod to the simplicity of Japanese aesthetics.



CG



DG

N

48" x 48" 24" x 48" 36" x 36"* 18" x 36" 24" x 24" 12" x 24" 2" x 2" Mosaic (12" x 12" Sheet)

3" x 24" Bullnose

DG

48" x 48" 24" x 48" 36" x 36"* 18" x 36" 24" x 24" 12" x 24" 2" x 2" Mosaic (12" x 12" Sheet)

3" x 24" Bullnose

AG

48" x 48" 24" x 48" 36" x 36"* 18" x 36" 24" x 24" 12" x 24" 2" x 2" Mosaic (12" x 12" Sheet)

3" x 24" Bullnose

CG

48" x 48" 24" x 48" 36" x 36"* 18" x 36" 24" x 24" 12" x 24" 2" x 2" Mosaic (12" x 12" Sheet)

3" x 24" Bullnose

FULL BODY RECTIFIED PORCELAIN



N

N

48" x 103" 48" x 48" 2" x 2" Mosaic (12" x 12" Sheet)

3" x 24" Bullnose

DG

48" x 103" 48" x 48" 2" x 2" Mosaic (12" x 12" Sheet)

3" x 24" Bullnose

AG

48" x 103" 48" x 48" 2" x 2" Mosaic (12" x 12" Sheet)

3" x 24" Bullnose

CG

48" x 103" 48" x 48" 2" x 2" Mosaic (12" x 12" Sheet)

3" x 24" Bullnose

GUAGED PORCELAIN SLABS



OUTDOOR NATURAL FINISH 2CM (3/4") PAVERS

CG	G	DG
36" x 36"*	36" x 36"*	36" x 36"*
24" x 24"*	24" x 24"*	24" x 24"*

AZUMA PORCELAIN PAVERS

Available in two sizes: 24" x 24" and 36" x 36" and three colors: CG, G, and DG, the Azuma collection of 2CM pavers are ideal for creating spaces that are guided by serenity.



G