














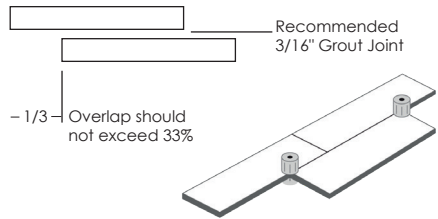




	Technical Specifications	Standard Requirements	Test Results Natural	Test Results 2CM Paver
	Water Absorption UNI EN ISO 10545-03	E ≤ 0.5%	< 0.5%	< 0.6%
	Breaking Strength UNI EN ISO 10545-04	> 1300 N	> 1300 N	> 11500 N
	Modulus of Rupture UNI EN ISO 10545-04	≥ 35 N/mm²	> 35 N/mm²	> 35 N/mm²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	Resistant	Resistant
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm²	175 mm²	175 mm²
	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	6.0 x 10 <sup>-6</sup> /°C <sup>-1</sup>	6.0 x 10 <sup>-6</sup> /°C <sup>-1</sup>
	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	Resistant	Resistant
	Frost Resistance UNI EN ISO 10545-12	Required	Resistant	Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB   Acids and Alkalies: As Reported	A/LA/HA	A/LA/HA
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 3	Class 3
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	N/A	N/A
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.42	> 0.42	> 0.42
	Shade Variation	As Reported	Ivory, Bluestone, Charcoal: V2 Multi: V4	Ivory, Bluestone, Charcoal: V2 Multi: V4
	Thickness	As Reported	9mm	20mm
	Number of Screens	As Reported	12"x24" - 48 24"x24" - 24 24"x48" - 12	24"x24" - 24

IMPORTANT

Please note that installing in a 50% staggered configuration is not recommended.  
We suggest the following 1/3 overlap installation method:




Use a Leveling system during installation to reduce lippage



www.happy-floors.com



BERWYN

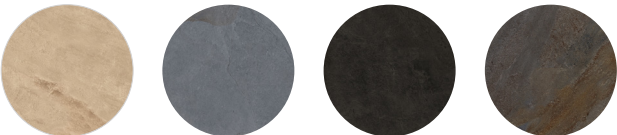

Ivory Bluestone Charcoal Multi





Charcoal

# BERWYN

BERWYN reimagines the rugged beauty of natural slate through the precision of porcelain. This versatile collection captures the layered texture, organic movement, and earthy depth of real stone—offering a timeless surface solution that's as durable as it is beautiful.


Available in four evocative tones—from a soft, sandy beige to a true-to-nature bluestone, a bold charcoal, and the iconic multicolor slate—BERWYN brings depth and character to any space. Its authentic look and matte finish make it an effortless match for both modern and rustic design aesthetics.

With the BERWYN collection, enjoy the soul of natural slate—without the maintenance, and with all the advantages of porcelain.

IVORY



24" x 48"



12" x 24"

BLUESTONE



24" x 48"



12" x 24"

CHARCOAL




24" x 48"



12" x 24"

MULTI




24" x 48"




12" x 24"




24" x 24"



24" x 24" 2CM  
(3/4" Thick Pavers)



24" x 24"



24" x 24" 2CM  
(3/4" Thick Pavers)



24" x 24"



24" x 24" 2CM  
(3/4" Thick Pavers)



24" x 24"



24" x 24" 2CM  
(3/4" Thick Pavers)



2" x 2" Mosaic  
12" x 12" Sheet



3" x 24" Bullnose



2" x 2" Mosaic  
12" x 12" Sheet



3" x 24" Bullnose



2" x 2" Mosaic  
12" x 12" Sheet



3" x 24" Bullnose



2" x 2" Mosaic  
12" x 12" Sheet



3" x 24" Bullnose



Ivory



Bluestone