



















	Technical Specifications	Standard Requirements	Test Results
	Water Absorption UNI EN ISO 10545-03	E ≤ 0.5%	< 0.1%
	Breaking Strength UNI EN ISO 10545-04	≥ 1300 N	> 1300 N
	Modulus of Rupture UNI EN ISO 10545-04	≥ 35 N/mm²	> 35 N/mm²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	Resistant
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm2	Resistant
	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	< 6.8 x 10 <sup>-4</sup> /°C <sup>1</sup>
	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	< 0.1 mm/m
	Frost Resistance UNI EN ISO 10545-12	Required	Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB Acids and Alkalis: As Reported	Complies with the Standard
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 3
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	Almond, Beige: 4   Silver: 5
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.42	≥ 0.42
	Shade Variation	As Reported	V2
	Thickness	As Reported	12" x 24", 24" x 24", 24" x 48", 48" x 48" - 10 mm 36" x 36" - 20 mm
	Number of Screens	As Reported	12" x 24" - 96   24" x 24" - 48   24" x 48" - 24   48" x 48" - 12   36" x 36" - 24

IMPORTANT

Please note that installing in a 50% staggered configuration is not recommended.  
We suggest the following 1/3 overlap installation method:

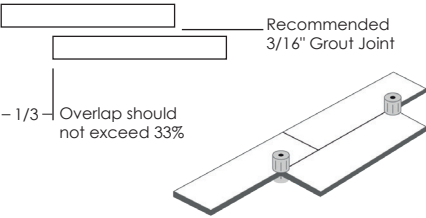

Use a Leveling system during installation to reduce lippage



www.happy-floors.com



CREW  
RECTIFIED GLAZED PORCELAIN



CREW



Almond



Beige



Silver

Silver



# CREW


CREW captures the timeless beauty of calcareous rock, bringing depth and character to any space. Designed for seamless aesthetic continuity between interiors and exteriors, this collection blends smooth, matte surfaces with an organic, tactile quality. Embedded with natural pebbles, CREW maintains a raw yet refined appeal—delivering the essence of stone in its purest form.

Available in three sophisticated shades—Almond, Beige, and Silver —CREW offers versatility and elegance for any design vision. Whether creating serene indoor retreats or harmonious outdoor landscapes, CREW transforms spaces with its authentic, grounded presence.

## ALMOND



48" x 48"\*




24" x 48"

## BEIGE



48" x 48"\*



24" x 48"

## SILVER




48" x 48"\*



24" x 48"



12" x 24"



24" x 24"

36" x 36"\*

2CM Paver



12" x 24"



24" x 24"

36" x 36"\*

2CM Paver



12" x 24"



24" x 24"

36" x 36"\*

2CM Paver



2" x 2" Mosaic  
12" x 12" Sheet



3" x 24" Bullnose



2" x 2" Mosaic  
12" x 12" Sheet



3" x 24" Bullnose



2" x 2" Mosaic  
12" x 12" Sheet



3" x 24" Bullnose

\*Special Order

