














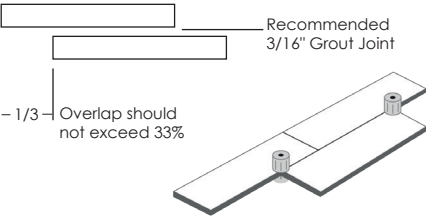




	Technical Specifications	Standard Requirements	Test Results Natural	Test Results Wall
	Water Absorption UNI EN ISO 10545-03	E > 0.5%	< 0.5%	< 0.5%
	Breaking Strength UNI EN ISO 10545-04	> 1300 N	> 1300 N	> 200 N
	Modulus of Rupture UNI EN ISO 10545-04	≥ 35 N/mm²	> 35 N/mm²	> 15 N/mm²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	Resistant	N/A
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm²	N/A	N/A
	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	6.0 x 10 ⁻⁶ /°C ⁻¹	6.0 x 10 ⁻⁶ /°C ⁻¹
	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	< 0.1 mm/m	< 0.2 mm/m
	Frost Resistance UNI EN ISO 10545-12	Required	Resistant	Not Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB Acids and Alkalies: As Reported	A/LA/HA	A/LB/HB
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 4	Class 5
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	White - 4 Almond, Maple, Natural - 3	N/A
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.42	> 0.42	N/A
	Shade Variation	As Reported	V2	V2
	Thickness	As Reported	8"x48" - 9mm	12"x36" - 7mm
	Number of Screens	As Reported	8"x48" - 32	12"x36" - 10

IMPORTANT

Please note that installing in a 50% staggered configuration is not recommended.
We suggest the following 1/3 overlap installation method:



Use a Leveling system during installation to reduce lippage



www.happy-floors.com

Almond



STOWE
GLAZED RECTIFIED PORCELAIN
& CERAMIC WALL TILE



STOWE



White Almond Maple Natural

Natural

STOWE

Inspired by the organic warmth of natural wood, the STOWE collection captures the timeless beauty of timber in a sophisticated ceramic cladding tile and a rectified porcelain plank. With a distinctive three-dimensional wall relief—whether installed vertically or horizontally—each wall plank creates a dynamic play of light and shadow, adding texture and depth to any interior space.

Available in a curated palette of four nature-inspired hues—from a breezy coastal white to a rich, mid-toned maple—STOWE seamlessly adapts to a variety of design aesthetics. Whether in contemporary, rustic, or minimal settings, it brings a sense of calm, warmth, and natural beauty indoors.

WHITE



8" x 48"



12" x 36"
Ceramic
Wall Tile

ALMOND



8" x 48"



12" x 36"
Ceramic
Wall Tile

MAPLE



8" x 48"



12" x 36"
Ceramic
Wall Tile

NATURAL



8" x 48"



12" x 36"
Ceramic
Wall Tile

Almond

White

