



















	Technical Specifications	Standard Requirements	Test Results Natural	Test Results Polished
	Water Absorption UNI EN ISO 10545-03	<0.5%	0.1%	0.1%
	Breaking Strength UNI EN ISO 10545-04	Minimum: 1300 N	1538 - 3690 N	1538 - 3690 N
	Modulus of Rupture UNI EN ISO 10545-04	Minimum: 35 N/mm²	37 - 65 N/mm²	37 - 65 N/mm²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: e > 0,55	Resistant	Resistant
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm³	N/A	N/A
	Thermal Linear Expansion UNI EN ISO 10545-08	Minimum for Floor Applications: Class 3	5.9 x 10⁻⁴ °C	5.9 x 10⁻⁴ °C
	Thermal Shock Resistance UNI EN ISO 10545-09	Resistant	Resistant	Resistant
	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant	Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/GB Acids and Alkalies: As Reported	GA GLA - GHA	GA GLA - GHB
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Resistant	Resistant
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	IV	IV
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.42	≥ 0.42	N/A
	Shade Variation	As Reported	V1	V1
	Thickness	As Reported	12" x 24" - 8.8 mm 24" x 24" - 9.3 mm 24" x 48" - 9.3 mm 32" x 64" - 9.7 mm 48" x 48" - 9.3 mm	
	Number of Screens	As Reported	All Sizes: 1 screen	

Grout joint required for rectified edge
tile 1/2 broken joint not recommended

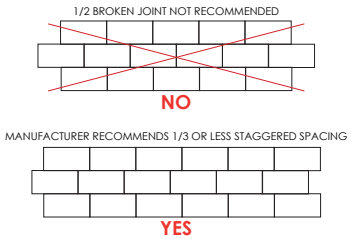

INSTALLATION TIPS

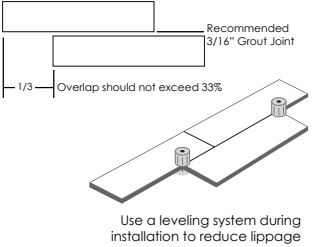

HAPPY FLOORS



≥ 34%



The data refers to first choice material in the natural version.

NATURAL



SOLID

BLANCO
RECTIFIED PORCELAIN





48" x 48"
Natural/
Polished

24" x 48"
Natural/
Polished

24" x 24"
Natural/
Polished

32" x 64"
Natural/
Polished

12" x 24"
Natural/
Polished

3" x 24" Bullnose
Natural/
Polished

2" x 2" Mosaic
Natural/
Polished
(12" x 12" Sheet)

Hexagon Mosaic
Natural/
Polished
(11" x 13" Sheet)
Net Coverage: 0.82 sqft

Herringbone Mosaic
Natural/
Polished
(9" x 12" Sheet)
Net Coverage: 0.59 sqft

NATURAL

BLANCO

Blanco is a brilliantly white contemporary collection of tile that's perfectly designed for brightening spaces. Bringing a touch of modernism

to businesses, homes, and beyond. This perfectly crisp, clean line is sure to refresh any space adding a feeling of expansiveness and calm.

“ Available in two finishes: natural and polished, the Blanco collection is home to a wide range of sizes: 48" x 103", 48" x 48", 24" x 48", 32" x 64", 32" x 32", 24" x 24", 12" x 24", mosaics: 2" x 2", hexagon and herringbone. No job is off limits to the splendor that Blanco offers. ”



POLISHED